

3M™ Fire Protection Products
3M™ Fire Barrier Moldable Putty+



Pliable. Conformable. Can Take the Heat.

Intumescent firestop putty that remains moldable for easy re-enterability.

3M™ Fire Barrier Moldable Putty+ is a one-part, ready-to-use firestop designed for wall openings, electrical outlet boxes, cable, conduit and pipes which penetrate fire-rated construction. When properly applied, 3M™ Fire Barrier Moldable Putty+ helps control the spread of fire, smoke and toxic gases through fire-resistive walls and floors.



3M™ Fire Barrier Moldable Putty+

When used in a through penetration firestop application the 3M™ Fire Barrier Moldable Putty+ intumesces in the annular space to completely surround the penetrant helping to prevent the spread of fire, smoke and toxic gas before, during and after exposure to a fire. The halogen-free, solvent-free formula is non-corrosive and is safe for sensitive electrical equipment.


3M™ Fire Barrier Moldable Putty+ meets ASTM E 814 (UL 1479) requirements for up to a 4-hour fire-rated system. In addition, these products help reduce sound transmission (STC-Rating of 52 when tested in STC 53-Rated wall assembly).

Features and Benefits

- Hand-moldable for easy application (no special tools or damming required)
- Low VOC, minimal odor
- Easily re-enterable for retrofit applications
- Will not dry out or crumble
- Formulated without asbestos
- Formulated without solvents and halogens
- Provides draft and cold smoke seal (L-Rating)
- Red color widely recognized as a firestop
- Helps reduce sound transmission



3M™ Fire Barrier Moldable Putty Pads MPP+ are typically used as a wall opening protective material to meet building requirements, for protection of membrane penetrations made by listed steel or non-metallic electrical boxes.

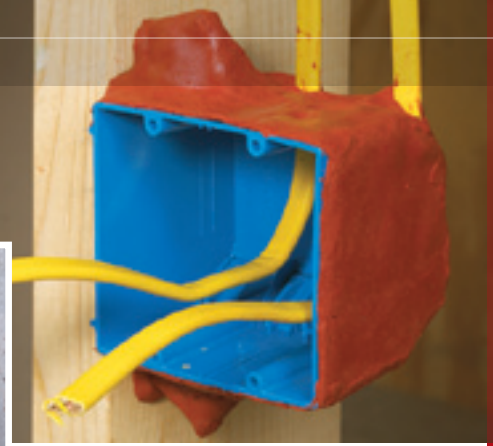

3M™ Fire Barrier Moldable Putty Stix MP+ are typically used to seal gaps between cables in multiple penetrations and to firestop cable bundles, insulated pipe, electrical conduit, metal pipe and other through penetrations.



Ordering Information

Product	Size	UPC	Units/Box
3M™ Fire Barrier Moldable Putty Pads MPP+ (nom. 1/10" thick)	4" x 8"	000-51115-16508-5	10
	7" x 7"	000-51115-16509-2	20
	9-1/2" x 9-1/2"	000-51115-16510-8	20
3M™ Fire Barrier Moldable Putty Stix MP+	1.4" dia. x 11"	000-51115-16526-9	10
	1.4" dia. x 6" (Retail)	000-51115-16561-0	12

3M™ Fire Barrier Moldable Putty Pads MPP+

 CLASSIFIED UL <small>WALL OPENING PROTECTIVE MATERIAL FIRE RESISTANCE CLASSIFICATION SEE UL FIRE RESISTANCE DIRECTORY 90G9</small>	 ULC LISTED <small>FILL, VOID OR CAVITY MATERIALS 90G9</small>	 CLASSIFIED UL <small>FILL, VOID, OR CAVITY FOR USE IN THROUGH-PENETRATION FIRESTOP SYSTEMS SEE UL FIRE RESISTANCE DIRECTORY 90G9</small>	 FM APPROVED <small>SUBJECT TO THE CONDITIONS OF APPROVAL AS A WALL & FLOOR PENETRATION FIRESTOP WHEN INSTALLED AS DESCRIBED IN THE CURRENT EDITION OF THE FMRC APPROVAL GUIDE</small>	<small>LISTED</small> Intertek <small>FIRESTOP SYSTEMS SEE INTERTEK DIRECTORY</small>
--	---	--	---	--

3M™ Fire Barrier Moldable Putty Stix MP+

Important Notice to User:

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty and Limited Remedy: 3M warrants that each 3M Fire Protection Product will be free from defects in material and manufacture for 90 days from the date of purchase from 3M's authorized distributor. 3M MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If a 3M product does not conform to this warranty, the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

© 3M 2012. All rights reserved.
Printed in U.S.A. 98-0400-5063-9 REV B

Please recycle.

3M is a trademark of 3M. Used under license in Canada. All other trademarks are the property of their respective owners.



Building and Commercial Services Division
3M Center
Building 223-2N-21
St. Paul, MN 55144-1000
800-328-1687
www.3M.com/firestop