The tapes OU trust to do the job





M™ Foil Tapes

FOR COMMERCIAL CONTRACTORS

3M™ Foil Tape 3340

MEETS REQUIREMENTS OF UL181A-P AND UL181B-FX, FOR PRINTED BACKING FOR HVAC SYSTEMS

For sealing rigid ducts & flexible non-metallic air ducts

- Ideal for sealing rigid, fiberglass ductboard systems and flexible, non-metallic air ducts
- Specifically designed for fiberglass ductboard systems
- · Resists moisture; thermally conductive for heating and cooling efficiency



CSI Division 23 HVAC*





3M™ Metalized Flexible **Duct Tape 3350**

MEETS REQUIREMENTS OF UL181B-FX

For closure and repair of flexible ducts and air connectors

- Printed metalized film with UL® Listed label
- · Secure flex duct-to-duct wrap facings and metal-to-metal connections
- Maximum temperature: 230°F (110°C)
- CSI Division 23 HVAC*



3M™ Damping Foil 2552

For use on ductwork and cables

- Reduces structure-borne noise in metal and composite panels
- . Meets flame retardancy requirements of F.A.R. Part 25.853(a)
- Passes ASTM E-162 and ASTM E-662 for flammability and smoke generation
- Maximum temperature: 140°F (80°C)
- CSI Division 23 HVAC*



3M[™] FSK Facing Tape 3320

MEETS REQUIREMENTS OF UL 723

The ultimate tape for cold weather

- · For sealing rigid- and blanket-style fiberglass duct insulation
- · High performance insulation tape is ideal for vapor sealing reinforced fiberglass and mineral-wool thermal insulation
- · Cold-weather, acrylic adhesive performs well over a wide range of temperatures
- · Ideal for making inconspicuous repairs to foil-backed insulation
- Mold resistant
- Maximum temperature: 175°F (79°C)
- CSI Division 7 Thermal Protection*



FOR UNSPECIFIED MULTI-USE

3M™ Aluminum Foil Tape 3380 and 3381

MEETS REQUIREMENTS OF UL 723

For general purpose HVAC applications

- · High strength, aluminum foil coated with a cold-weather, acrylic adhesive system
- · Combines superior quick stick with excellent low temperature performance
- Use for sealing foil-faced foam sheathing boards, reflective insulation materials, duct wraps and residential insulation batts
- Maximum temperature: 250°F (121°C)
- CSI Division 7 Thermal Protection*



3M™ Roof & Gutter Repair Tape 3382

For flashing and gutter repair


- Multi-ply laminate designed to repair and patch metal gutters
- · Adheres quickly and permanently to wet or dry surfaces
- Excellent temperature performance
- Maximum temperature: 250°F (121°C)
- CSI Division 7 Roofing*





Protect, seal and repair

Tough and versatile, with a wide range of unique characteristics, 3M[™] Foil Tapes are indispensable on the jobsite. From sealing ducts and reflective insulation; repairing air connectors, roofs, gutters and flashing; to creating vapor barriers in extreme temperature

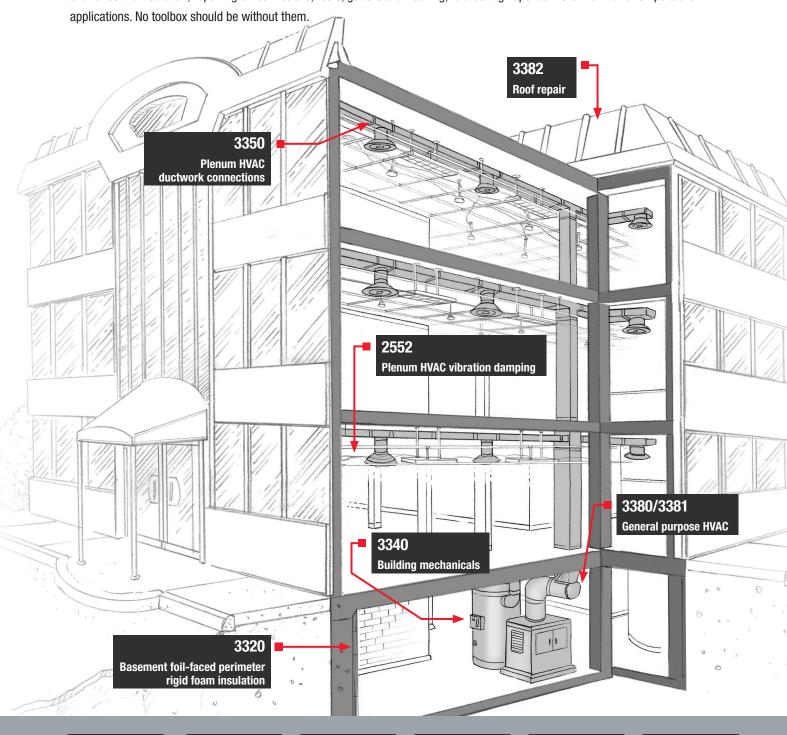















to do the job right. That's why they trust 3M—a world leader in industrial technologies—for the tough, innovative tapes and adhesives they can use all over the jobsite.

3M™ Foil Tapes

Product Name		UPC	Size	Qty./Case	Case/Pallet
3M [™] Foil Tape 3340 Individually Wrapped in Display Case	UL LISTED	000-51111-07811-2	2.5 in x 50 yd (63 mm x 45.7 m)	9 rolls/case	70 cases/pallet
3M [™] FSK Facing Tape 3320 Individually Wrapped		000-51115-31530-5 000-51115-31531-2 000-51115-31532-9	1.88 in x 50 yd (48 mm x 45.7 m) 2.83 in x 50 yd (72 mm x 45.7 m) 3.89 in x 50 yd (99 mm x 45.7 m)	24 rolls/case 16 rolls/case 12 rolls/case	36 cases/pallet 36 cases/pallet 36 cases/pallet
3M [™] Metalized Flexible Duct Tape 3350 Individually Wrapped in Display Case	UL) LISTED	000-51111-07817-4	1.88 in x 120 yd (48 mm x 109.6 m)	12 rolls/case	70 cases/pallet
3M Damping Foil 2552 Bulk		000-21200-38395-3	2 in x 36 yd (50.8 mm x 32.9 m)	5 rolls/case	27 cases/pallet
3M™ Aluminum Foil Tape 3380 Individually Wrapped in Display Case		000-51111-97419-3 000-51111-97421-6	1.88 in x 49 yd (48 mm x 45 m) 2.83 in x 49 yd (72 mm x 45 m)	24 rolls/case 16 rolls/case	36 cases/pallet 36 cases/pallet
3M [™] Aluminum Foil Tape 3381 Individually Wrapped in Display Case		000-51111-07812-9	1.88 in x 50 yd (48 mm x 45.7 m)	12 rolls/case	70 cases/pallet
3M[™] Roof and Gutter Repair Tape 3382 Individually Wrapped in Display Case		000-51111-07818-1	1.88 in x 10.9 yd (48 mm x 10 m)	12 rolls/case	120 cases/pallet

PRODUCT USE: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

WARRANTY, LIMITED REMEDY, AND DISCLAIMER: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

LIMITATION OF LIABILITY: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Industrial Adhesives & Tapes Division

Building 225-3S-06 St. Paul, MN 55144-1000 1-800-362-3550 www.3M.com/industrialtapes 3M is a trademark of 3M.
UL and the UL logo are trademarks of UL LLC.
Please recycle. Printed in USA.
© 3M 2013. All rights reserved.
70-0716-1653-9